
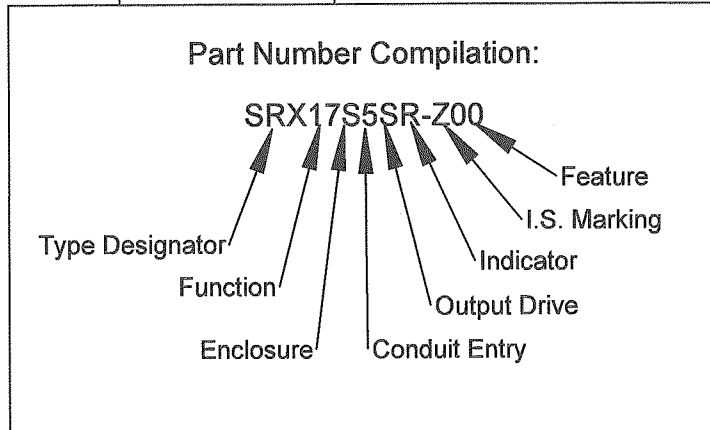


Type SRX

<u>FUNCTION</u>	<u>ENCLOSURE</u>	<u>CONDUIT</u>	<u>OUTPUT DRIVE</u>	<u>INDICATOR</u>	<u>I.S. MARKING-ATEX</u>	<u>FEATURE DESIGNATOR</u>
17 - (2) SPDT Gold Contact Mechanical Switch (Passive Device) up to 0.5 amps @ 30VDC	S - 316SS Cover & Housing	5 - (2) M20 x 1.5	L - NAMUR Output 15mm	R - RED CLOSED / GREEN OPEN (ABS material of construction)	- Z - Volt Free Contact Switch	xx - Feature (see Note 1)
40 - (2) SPST or SPDT Reed Switch (Passive) 0.15 Amps @ 30VDC	9 - Aluminium Cover & Housing	B - (2) 1/2" NPT	M - NAMUR Output 25mm	C - 0 - 100% GRADUATED (ABS material of construction)	- Y - Certified Proximity Sensor Type 1	
42 - (2) V3 Style Proximity Sensor ATEX Certified to Exia IIC T4/T5/T6			S - 2 Pin Drive	O - NO VISUAL INDICATOR	- W - Certified Proximity Sensor Type 2	
43 - (2) Non V3 Style Proximity Sensor ATEX Certified to Exia IIC T4/T5/T6					- V - Certified Transmitter (with optional Type 2 sensors)	
52 - (3 to 6) V3 Style Proximity Sensor ATEX Certified to Exia IIC T4/T5/T6					- U - Certified Proximity Sensor Low Temperature -Type 2	
53 - (3 to 6) Non V3 Style Proximity Sensor ATEX Certified to Exia IIC T4/T5/T6					- T - Certified Proximity Sensor Low Temperature -Type 1	
56 - (3 to 6) SPDT Gold Contact Mechanical Switch up to 0.5 amps @ 30VDC					- J - Certified Transmitter (with optional Volt free switches)	
59 - (3 to 6) SPST or SPDT Reed Switch (Passive Device) 0.15 Amps @ 30VDC						
70 - POSITION TRANSMITTER 4-20mA @ 10 - 30 VDC - Certified Exia IIC T4/T5/T6 monitor may include up to 2 additional switch/sensors from functions 17, 40, 42 or 43						

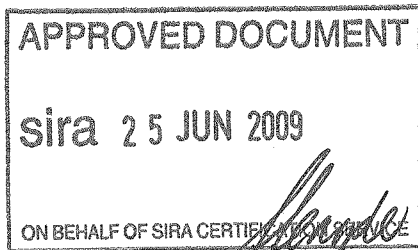

NOTE 1:  
The exact detail of switches/sensors/transmitters fitted in the monitor is not fully specified by the basic part number. The last 2 digits of the 'feature designator' provides a mechanism for cross-referencing to a centralised log establish the make and model of parts fitted in a given unit.

FURTHER NOTES:  
Function assemblies 17, 40, 42 and 43 use a short cover. Where function 43 uses cylindrical sensors longer than 36mm, a tall cover is used. Function 52, 53, 56, 59 and 70 use a tall cover.

REV	DRAWN	DATE	CHK'D	ECO	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:
	PT	30.1.09		09-975	

TITLE:  
Type SRX - I. S. - ATEX Master Model Description

This private & confidential drawing is the property of Imtex Controls Limited, Tonbridge, UK and cannot be copied or reproduced without the express written permission of the Company.

Imtex Controls Limited  
Unit 5A, Valley Industries, Hadlow Road  
Tonbridge, Kent, TN11 0AH. United Kingdom  
Tel:+44(0) 1732-850360 Fax:+44(0) 1732-852133  
Website: www.imtex-controls.com

DWG NO. **A190193** A4

SCALE:1:1 SHEET 1 OF 1